

PALFINGER

P 280 AXE SMART

**RELIABILITY, SAFETY
AND PERFORMANCE IN
THE MOST COMPACT
CONFIGURATION OF
THE MARKET**

LIFETIME EXCELLENCE



TECHNICAL SPECIFICATIONS


Max. working height	27.80 m
Max. basket bottom height	25.80 m
Max. outreach	14.80 m
Angle of main boom	-20° a + 80°
Turntable rotation	370°
Basket rotation	90° x 90°
Basket load	230 kg
Size of basket	1.69 x 0.93 x 1.1 m
Height in transport position	3.33 m
Width in transport position	2.25 m
Length in transport position	6.67 m
Can be driven with a class C license	

OPTIONAL

Fiberglass basket
Insulation 1000 V
Aluminium Side bars 200 mm
Basket load device
Electric motor 230 V
Working adjustable light 60 W on the basket
Customised paintwork boom

WORKING DIAGRAMS

At the front, the 2 outriggers are installed on hydraulically extendable arms that generate 2 stabilisation set-ups.

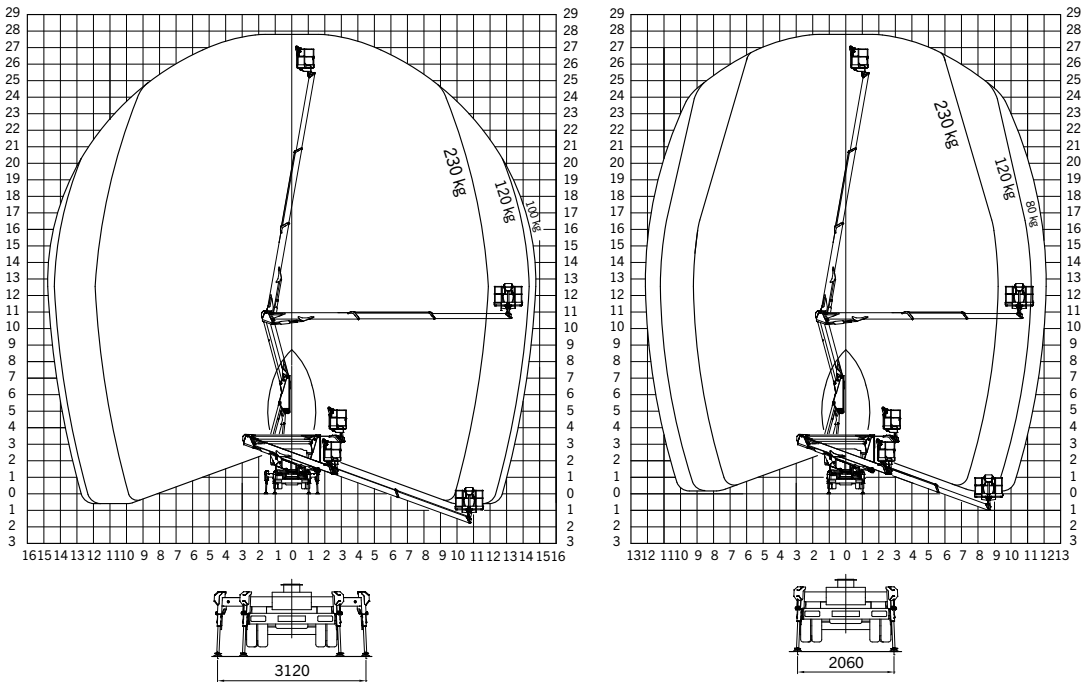

DIMENSIONS



SALES DEALER

Units shown in the leaflet are partially optional equipped and do not always correspond to the standard version. Country-specific regulations must be observed. Dimensions may vary. Subject to technical changes, errors and translation mistakes.